

A Middleware Based Network Hot Swapping Solution for SCA Compliant Radio

Md. Kamrul Hasan, Lenin Mehedy, Muhammad Salim Zabir, Sungyoung Lee, Young-Koo Lee

Abstract — *Software Communication Architecture (SCA) provides a framework for developing Software Defined Radios (SDR). Theoretically, SCA compliant SDRs are supposed to have the capability of self-configuring and switching from one wireless protocol to any other. However, conventional SDRs running standard upper layer protocol stack fail to switch wireless protocols on the fly retaining all the connections and incur large delay. In this paper, we propose a mechanism for wireless protocol switching that is free from these problems. We base our approach on dual or multiple antennas operable by SDR software. The main contribution of this paper is the Hot Swapping Middleware (HSM) that ensures seamless switching between wireless protocols without affecting the application performance. HSM manages IP addressing issues transparently and ensures in order delivery of data packets without loss. Our proposal is free from any requirement of infrastructure support, light weight and easily SCA component upgradeable. Simulation results show that our proposal improves the total data transfer of applications in an SDR by more than 25%. We also have developed a proof-of-concept prototype¹.*

Index Terms — **Software Radio, SCA, Hot Swapping Middleware, Middleware.**

I. INTRODUCTION

With the expansion of different wireless networking technologies, Software Defined Radio (SDR) has been gaining increasing attention in recent years. JTRS has played a pivotal role in the process through their standard Software Communication Architecture (SCA). SCA provides a framework for developing Software Defined Radios (SDR). Theoretically, SCA compliant SDRs are supposed to have the

capability of self-configuring and switching from one wireless protocol to another [1]-[7]. However, conventional SDRs running standard upper layer protocol stack like TCP/IP, fail to switch wireless protocol on the fly without affecting the application performance. Usually, each wireless protocol switch involves a change in the IP address of the SDR device unless both wireless access points and base stations belong to the same network. A change in the IP address results in a discontinuation of traditional connection oriented protocols like TCP. This problem may be solved by Mobile IP [12], [13] or USHA [11] at the cost of infrastructure requirement and large hand off latency. Also, their adoption causes data loss due to large handoff latency.

Infrastructure requirement is expensive and difficult to deploy in practice. On the other hand, large handoff latency causes data loss which ultimately leads to degradation in Quality of Service (QoS) as experienced by the application.

In this paper, we therefore propose a mechanism of network switching for SCA compliant SDR which overcomes the above problems [15]. That is, our proposal ensures replacement of wireless network protocol or network switching without affecting an SDR's operation. This essentially complies with the definition of hot swapping or hot plugging in general. Therefore, we name our proposal as network hot swapping. At the base of our approach lies dual or multiple antennas operable by different SDR software. The main contribution of this paper is the Hot Swapping Middleware (HSM) that ensures seamless switching between wireless protocols without affecting the application performance.

Hot swapping means plug ability of hardware or re configurability and upgradeability of the software components. Software hot swap infrastructure provides an auto-managed mechanism to reconfigure or upgrade software, component wise, in such a way that the operation of the whole software is not interrupted. It is highly desirable that the downtime to be zero or near to zero.

Software radio brings a band of waveform from antenna and processes that in software [1]-[7]. Because of the software processing, it is possible to reconfigure a software radio for many different wave forms. It is easily possible to configure a handheld to be a GSM handset or a WLAN receiver. But current software radios cannot do network switching on the fly, retaining all the connections. The radio turns off network activities, configures itself for a different protocol and then starts working again. Although, some similar efforts are found in the literature in the name of vertical hand off [8]-[13] for

¹ This research was supported by Ministry of Knowledge Economy, Korea, under ITRC program supervised by Institute of Information Technology Advancement (IITA-2009-C1090-0902-0002). This work was also supported by KOSEF grant funded by the Korean government (MEST, No. 2008-1342), and was supported by Basic Science Research Program funded by National Research Foundation (2009-0076798).

Md. Kamrul Hasan is with Ubiquitous Computing Lab, Kyung Hee University, South Korea. (email: kamrul@oslab.khu.ac.kr)

Lenin Mehedy is with University of Melbourne, Australia. (email: leninmehedy@yahoo.com)

Muhammad Salim Zabir is with Kyushu University, Japan. (email: szabir@yahoo.com)

Sungyoung Lee is with Ubiquitous Computing Lab, Department of Computer Engineering, Kyung Hee University, South Korea. (email: sylee@oslab.khu.ac.kr). Prof. Sungyoung Lee is the Corresponding Author.

Young-Koo Lee is with Department of Computer Engineering, Kyung Hee University, South Korea. (email: yklee@khu.ac.kr)

non software radios, all of those demand external infrastructure support. Multi-homing techniques [8]-[10] require transport layer of every intermediary hosts/server to be modified and thus they incur very high deployment cost. Mobile IP based solutions [12],[13] deploy home agents and foreign agents to assure zero packet loss. However, they cannot guarantee zero delay. These types of solutions also require infrastructural change that may not be possible to achieve. USHA [11] provides a middleware based solution using IP-tunneling on UDP. It provides seamless network traffic for both horizontal and vertical handoff. This solution seems to be good, but it also needs an external middleware support. Hence those vertical handoff solutions are not appropriate, if we look for a solution confined within the mobile host. Recently, there is a work [16] that provides a mechanism to calculate utility function for taking vertical handoff decision between WLAN and WiMAX based on Mobile Host (MH)'s predictive residence time in the target Base Station. The predictive residence can be calculated by using MH's movement direction, velocity, and range of the target Base Station. The solution is based on Mobile IP technology, demanding infrastructure support. The vertical handoff decision mechanism based on MH's predictive residence time, is complementary to our Hotswap Decision Module. However, our focus is on providing seamless hot swapping without infrastructure support.

So, in this paper, we present a middleware based hot swapping mechanism for protocol stack switching. Our proposed solution needs zero infrastructure support but ensures zero packet loss. We present the mechanism in an SCA compliant radio; because SCA provides a modularized, platform independent radio definition which is indispensable for any hot swapping architecture [5].

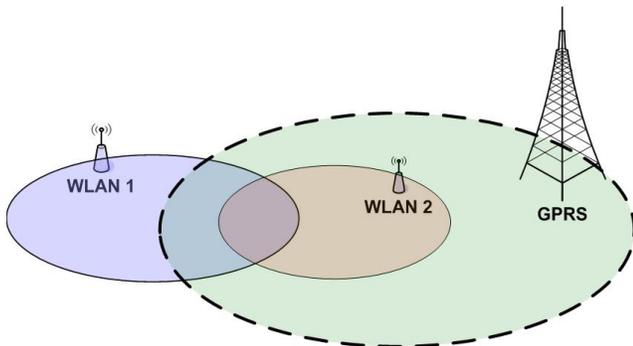


Fig. 1. Spatially overlapping networks

We name the protocol stack switching as network hot swapping, characterized by zero packet loss and zero latency gained without any external infrastructure. Our mechanism involves the physical layer, LLC layer and network layer. In this paper, we will discuss only about IP in the network layer to prove our concept. By definition, our solution involves both hardware and software hot swapping. Actually, the only hardware part in a software radio is the antenna. As it is not possible to configure a single antenna to receive two waveforms simultaneously, we propose software radios with multi/dual antenna. Multiple antennas are indispensable for

network hot swap capable software radio. We configure two antennas for two different network protocols at the same time, continue the parallel communication for a while, and then turn one protocol off.

We imagine a scenario where several wireless networks are operating and they overlap in places (Figure 1). A user may roam in these networks. While roaming several situations may occur. A user may change the cell of same type of network e.g. WLAN1 to WLAN2, which is called horizontal handoff. Horizontal handoff is easily achievable as the protocol itself provides the handoff mechanism. However, when the user moves to a different network e.g. WLAN2 TO GPRS or GPRS to WLAN2, technical as well as economic criteria come into play. We want to provide seamless network switching in this environment considering the contexts:

- Mobility
- Heterogeneous Networks
- Cost of network connectivity (e.g. GPRS, WLAN etc. may have different usage cost per unit time)

In The later sections we will be elaborating our idea.

II. OUR PROPOSAL

Our assumption is that user is communicating over the internet using SCA compliant radio. With the SCA compliant radio, suppose the user was transferring a file over the internet. Now, as the user moves from one network to another e.g. WLAN to GPRS in Figure 1, several situations may occur:

- IP may change (i.e. WLAN to GPRS or vice versa)
- TCP session will be interrupted due to IP change
- Source needs to be informed about destination SDR's new IP
- Loss of packets due to network switching

But we want to provide seamless network transfer. The challenges that lie here are providing *uninterrupted TCP session* and *zero packet loss* without taking support of any *external proxy* or *middleware*. The physical challenge is configuring dual network interface simultaneously which is still unconventional in the current software radios. We propose a multi/dual antenna based SCA compliant radio to solve this issue. We discuss about configuring multiple physical interfaces first and then delve into our solution, because configuring and switching interfaces is basic task of our solution.

A. Multi/Dual Antenna based Software Radio

Multi/dual antenna is indispensable for zero packet loss during Network Hot Swap. Packet loss occurs in SDR due to long delay for configuration of one antenna for network switching. We can continue full-duplex operation through one antenna while configuring the other one for another network. Thus we may achieve zero packet loss during network switching.

Above the antenna we provide *Modem Configuration Module*, which configures the antennas for different waveforms and for different protocols by associating

appropriate modulators and demodulators with them. A *Hot Swap Decision Manager* works on top of the *Modem Configuration Module* to decide when to initiate the swap.

B. Hot Swap Decision Module

As we have discussed in the introduction that we want to provide network hot swapping based on the contexts: mobility, availability of heterogeneous networks and the cost for using the network. So, that way, seamless network switching also becomes context aware, which is a motto of ubiquitous computing. Generally, a network switching occurs when user is moving to some direction and the mobile host usually switches to the best available network. The best available network means, the network with strongest signal coverage and/or network with higher bandwidth.

The switching may be decided based on the cost also. Suppose the user was watching an online video stream on the WLAN. There was a GPRS network present there. However, due to high cost of GPRS, the user did not use it. But suddenly the WLAN becomes congested or packet error rate increases in WLAN, so the user switches to GPRS.

All these factors can be put in an equation or as the parameters of some policies to provide some context awareness. The context change decision can be made by the user exclusively also. But we think that automated decision making and quick switching is more desirable than explicit user intervention.

Network Swap decision Manager (Figure 2) monitors the interfaces by taking signal strengths and other parameters from Modem Control Module. The manager may take some input from the operating system also. It can have some previous policies set inside it. Based on the previously set option, manager will take a decision to switch the network or may prompt to the user for explicit consent. After the decision is made, manager instructs the Modem Control Module to instantiate a new modem and initializes it.

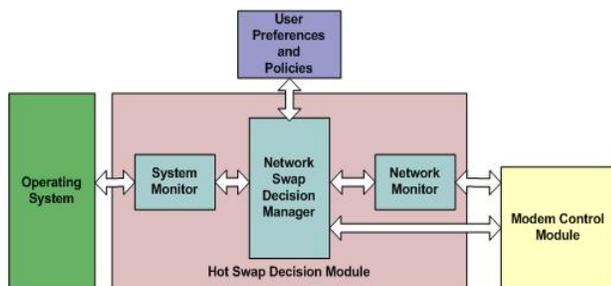


Fig. 2. Network Swap Decision Manager

C. New Modem Configuration

After the Hot Swap Decision Manager instructs the Modem Control Module to swap networks, the Modem Control Module initiates a New Modem Configuration (see Figure 3):

- Modem Control Module instructs the antenna module to free one antenna and antenna 2 is separated

- Modem Control Module configures Modem 2 and Modem 2 in turn configures Antenna 2
- Then Modem 2 acquires an IP address.
- The IP address is in turn passed to Modem Control Module which passes the IP address to upper layer. If the host implements our IP Level Middleware, then the middleware gets the IP and stores it in its mapping table.

The same way any communicating modem can be stopped by the Modem Configuration Module, if the decision comes from the Network Swap Decision Manager. Now we discuss our solution *IP Level Middleware for Hot Swapping*:

D. IP Level Middleware for Hot Swapping

We assume that Mobile host (MH) can receive data through multiple wireless protocols simultaneously (i.e. WLAN, GPRS, CDMA). MH can measure channel information for different wireless protocols while receiving/transmitting data and then the user or the Hot Swap Decision Manager decides to change the network. When the MH changes the network, it also changes the IP address. We assume that there is no external infrastructure support. The base station may or may not transmit using multiple interfaces. We say that by deploying our IP Level Hot Swapping Middleware (HSM), the mobile hosts can still switch the networks seamlessly with zero packet loss.

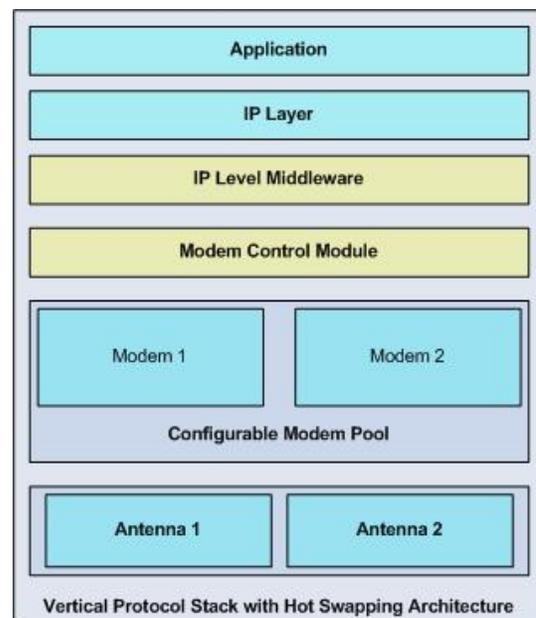


Fig. 3. Hot Swapping Architecture

D.1 Hot Swapping Architecture (Figure 3)

IP Layer gives the packet to IP Level Hot Swap Middleware (HSM), considering it as an LLC component. IP Level Middleware duplicates the packet for the second interface and gives it to Modem Control Module. So, IP Level Middleware is also an IP Level component to the Modem Control Module

The rest of the IP packets come through the second modem and the IP Middleware replaces ip2 with ip1 in the destination field of the packet before giving it to upper layer.

III. EVALUATION

A. Simulation Environment

We evaluate our proposal through extensive simulations. Through comparisons with the existing conventional SDR, we establish the superiority of our proposal.

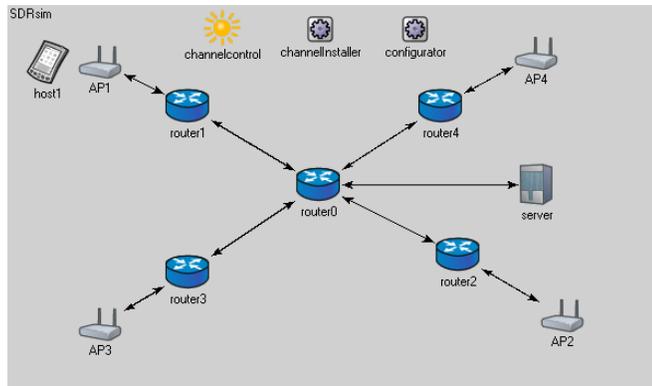


Fig. 5. Simulation model for evaluation of our scheme

In our experiments, we assume a TCP-Reno source at a fixed host or server that transfers bulk data to a software radio enabled mobile host (Figure 5). This mobile host roams within four different wireless networks through four different Access Points or base-stations (AP1 through AP4). Each time the host changes the point of attachment from one AP to another, a handoff occurs. Network switching results in problems like change of IP address and before a handoff takes place; there may be a period of disconnection.

We use the popular OMNET++ simulator [14] for evaluations. The wireless protocols being simulated are IEEE 802.11 or some variants of it – all operating at a data rate of 2 Mbps. Also, in order to avoid simulation complexity without loss of generalization, we simulated the wireless networks and the server as connected to a common switch. Our mobile host takes a random path or direction in this simulated area. Upon reaching the boundary of simulation field, the host changes its direction and starts moving again.

B. Performance Metrics

We use the following performance metrics for evaluation of our proposed framework under the simulation environment: Acknowledged Data Sequence, Throughput and Access Point or Base Station Traffic.

C. Simulation Results

We carry out experiments through simulations of a large FTP session from the server to the mobile host. It has been proved in our simulations that with its Hot Swapping

Middleware (HSM) based two antenna support, our mobile host SDR continues to receive data even at the occurrence of a handoff. On the other hand, the conventional SDR fails to maintain connectivity during these times that result in a degraded performance. For the sake of a fair comparison, we assume that in conventional approach, the mobile host will adopt some mechanism like mobile IP or USHA [11] in order to continue the session even after a handoff and corresponding change of IP address. We conducted sets of experiments that run for 100 seconds of simulated time.

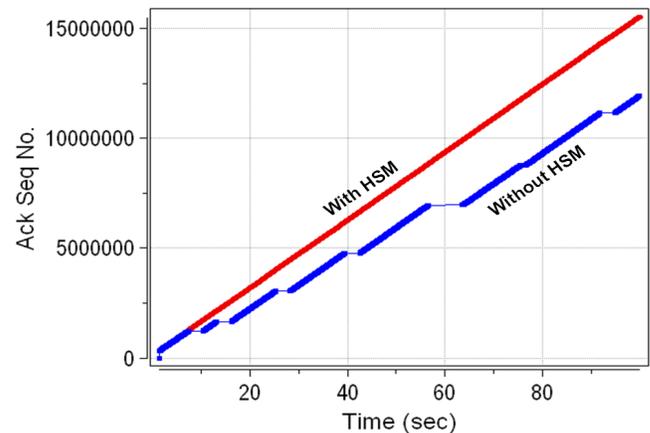


Fig. 6. Sequence number of data acknowledged by the receiver

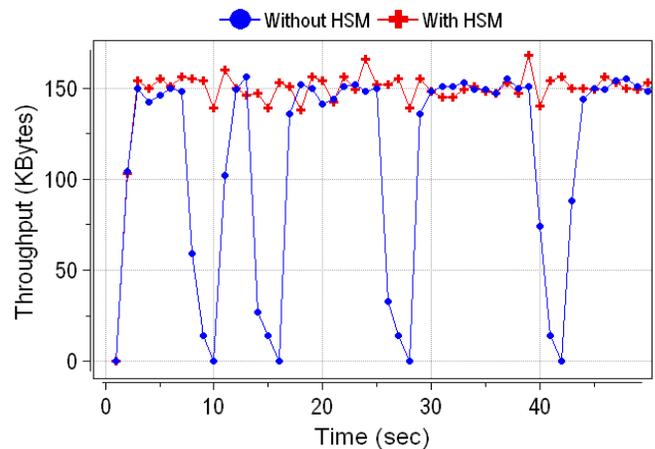


Fig. 7. Throughput per each one second interval

C.1 Acknowledged Data Sequences

In Figure 6, we show a comparison between the sequence numbers of acknowledged data during the FTP session using our dual antenna middleware assisted SDR solution and the conventional SDR. We observe that with our HSM, the sequence number curve is a straight line without any breaks. That means, with dual antenna HSM, SDR does not get affected by the handoff. To the contrary, without our HSM, conventional SDR shows breaks in transmission during each handoff due to disconnections. As we can

observe from the curves that at the end of this 100 sec simulation, our HSM scheme results in more than 25%, i.e., a significant increase in acknowledged data than conventional SDR.

C.2 Throughput

Figure 7 shows variation of throughput with time. Here also, we observe that dual antenna HSM supported SDR maintains a consistent average throughput without any significant degradation at any time. To the contrary, conventional scheme, although, sometimes maintains an average throughput value, it degrades to zero throughput at times of handoff. The reason is, during handoff related disconnection, there is no transfer of data. This ultimately leads to a low yield in total or overall throughput.

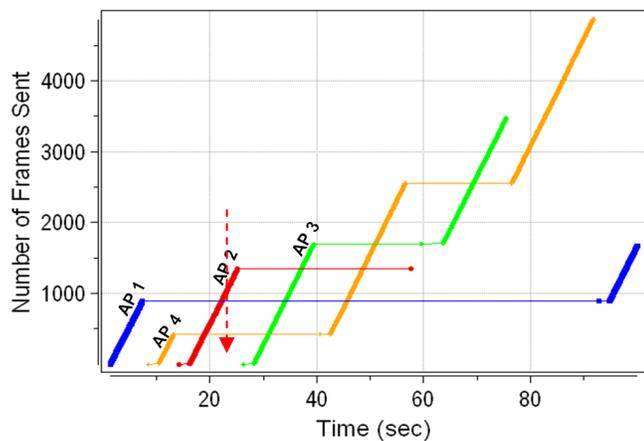


Fig. 8. Access point data traffic pattern for conventional SDR

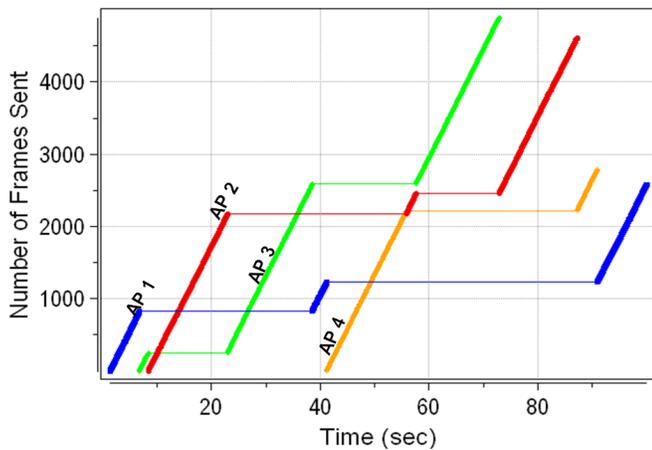


Fig. 9. Access point data traffic pattern for multi antenna HSM SDR

C.3 Access Point or Base Station Traffic

Figure 8 and Figure 9 show the effective traffic pattern at different APs before and after handoffs in cases of conventional SDR and dual antenna HSM SDR respectively. Here again, we observe that in conventional case, no AP transfers data traffic to the SDR during handoff. While in the case of HSM SDR, there is no break in effective traffic. That

is, whenever there is a switch of networks, the new AP starts transmitting data immediately. For example, in case of the handoff at 25 sec between AP2 and AP3, Figure 8 shows some gap for AP3 to take over. However in Figure 9, AP3 starts functioning immediately.

IV. IMPLEMENTATION

Due to unavailability of any software radio with us, we implemented a prototype using two desktop PCs, one with two interfaces. Two PCs are put in geographically distant places in the university network. The goal of this experiment is to establish that our HSM does actually ensure seamless connectivity. In the experimental setup an ftp connection is opened, the desktop PC with two interfaces being the client. While transfer is continuing, the Ethernet cable of the interface associated with ftp session is unplugged intentionally. Without using the middleware the connection is reset as expected. But with the middleware code implemented in both sides, the ftp transfer finishes smoothly.

We used evaluation version of packet Sniffer SDK² that facilitates hooking the network interfaces and snooping the packets. As this API does not support Wireless interface, we had to use Ethernet interfaces only. However, it does not pose any burden to the proof of the concept.

We used 'HNAdapterConfig' component and its related classes in the API to capture the condition of the interfaces and hence acts as Modem Control Module. Hot Swap Decision Manager is a class that receives the Ethernet interface status from Modem Control Module and when detected cable unplugged, takes the IP address of the second interface to instruct HSM to initiate swapping. HSM uses 'HNAdapter' component of the API for capturing and sending packets to an interface.

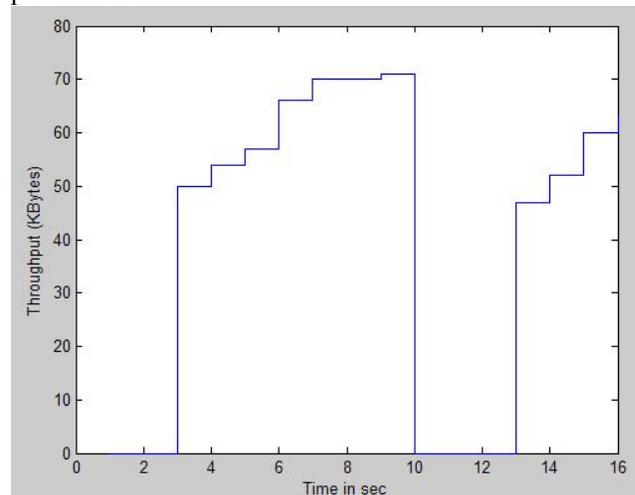


Fig. 10. Throughput of the ftp connection

The Modem Control Module runs in a loop with delay of 1 second to get the status of Ethernet interface. When the cable is unplugged, it gets the status within 1 second.

² Packet Sniper SDK: <http://www.microolap.com/products/network/pssdk/>

The sole purpose of the prototype is to make a realization of the concept. The throughput (see Figure 10) for the ftp session is similar to the simulation with a drop of data transfer to zero for few seconds (10-12 seconds in Figure 10). The drop is because of the time gap between detecting the unavailability of the Ethernet interface and responding accordingly. Two parallel transmissions were not considered to keep the Hot Swap Decision Manager simple and to test the performance in worst case scenario. The transmission drop time never exceeded the ftp session timeout.

V. CONCLUSION

In summary, we provide a solution for network hot swapping for SCA compliant radio. We also incorporate context awareness in taking the swap decision. The basis of our solution is software radio with multiple (e.g. double) antennas. Multiple antennas enable SDR to have a standby antenna that can be configured to a different protocol while the other antenna is still operating using the current communication protocol. Thus, we achieve zero configuration time and zero packet loss during network switching. We exclude the requirement for external proxy or middleware by including an IP Level Middleware for Hot Swapping. Simulation results show that our Hot Swap Middleware effectively solves the network hot swapping problem.

REFERENCES

- [1] J. Mitola, "The Software Radio Architecture," IEEE Commun.Mag., vol. 33, no. 5, May 1995, pp. 26–38.
- [2] M. Cummings and S. Heath, "Mode Switching and Software Download for Software Defined Radio: The SDR Forum Approach," IEEE Commun. Mag., vol. 37, Aug.1999, pp. 104–6.
- [3] M. Mehta et al., "Reconfigurable Terminals: An Overview of Architectural Solutions," IEEE Commun.Mag., vol. 39, Aug. 2001, pp. 82–89.
- [4] N. Nakajima, R. Kohno, and S. Kubota, "Research and Developments of Software-Defined Radio Technologies in Japan," IEEE Commun. Mag., vol. 39, Aug. 2001, pp.146–155.
- [5] SCA specification, JTRS-5000, SCA V3.0, Aug 27, 2004.
- [6] Enrico Del Re (Ed), Software Radio Technologies and Services, Springer, ISBN 1-85233-346-4.
- [7] S. Hykin. "Cognitive Radio: Brain-Empowered Wireless Communications". IEEE Journal On Selected Areas In Communications, Vol. 23, No. 2, February 2005.
- [8] A. Matsumoto, M. Kozuka, K. Fujikawa, and Y. Okabe. "TCP Multi-Home Options," draft-arifumi-tcp-mh-00.txt, IETF Internet draft, Oct.2003.
- [9] A. C. Snoeren. "A Session-Based Approach to Internet Mobility," PhD Thesis, Massachusetts Institute of Technology, December 2002.
- [10] R. Stewart et al. "Stream Control Transmission Protocol," RFC 2960, IETF, Oct. 2000.
- [11] L. J. Chen, T. Sun, M. Gerla. "USHA : A Practical Vertical Handoff Solution," Mobiquitous 2004.
- [12] S. Sharma, I. Baek, Y. Dodia, T. Chiueh, "OmniCon: A Mobile IP-based Vertical Handoff System for Wireless LAN and GPRS Links", LISA 2004.
- [13] Mark Stem and Randy Katz, "Vertical Handoffs in Wireless Overlay Networks," In ACM Mobile Networking (MONET), Special Issue on Mobile Networking in the Internet, 1997.
- [14] Varga, András and Hornig, Rudolf, "An overview of the OMNeT++ simulation environment", Simutools '08: Proceedings of the 1st international conference on Simulation tools and techniques for communications, networks and systems & workshops. Pages: 1-10.
- [15] Md. Kamrul Hasan, Lenin Mehedy, Salahuddin Muhammad Salim Zabir, Sungyoung Lee, Sang-chul Oh, "A Middleware Based Network Hot Swapping Solution for SCA Compliant Radio," In the proceedings of 7th IEEE Symposium on Signal Processing and Information Technology (ISSPIT'07), Cairo, Egypt, Dec 15-18, 2007, pp. 99-104
- [16] Wonjun Lee, Eunkyo Kim, Joongheon Kim, Inkyu Lee, Choonhwa Lee, "Movement-Aware Vertical Handoff of WLAN and Mobile WiMAX for Seamless Ubiquitous Access," IEEE Transactions on Consumer Electronics, Vol. 53, No. 4, November 2007, pages: 1268-1275



Md. Kamrul Hasan is a Ph.D student in Ubiquitous Computing (UC) Lab, Kyung Hee Univeristy, South Korea . He is also a Senior Engineer at Architect Group, A software security and quality assurance company in Seoul, South Korea since 2008. He received his Bachelors in Computer Science and Information Technology from Islamic University of Technology, Bangladesh in 2002.



Lenin Mehedy is a Ph. D student in University of Melbourne, Australia . He completed his M.S. from Ubiquitous Computing Lab, Kyung Hee University in 2007. Lenin received a Bachelor degree in Computer Science and Engineering from Bangladesh University of Engineering and Technology in 2004.



Mohammad Salim Zabir received his B.S. and M.S. Bangladesh University of Engineering and Technology. He did his Ph.D from Tohoku University, Japan. He is now an Associate Professor in Kyushu University, Japan. He was a visiting Professor at Ubiquitous Computing (UC) Lab, Kyung Hee Univeristy, South Korea in Fall, 2006. He worked in National Panasonic, Japan for a long time.



Sungyoung Lee received his B.S. from Korea University, Seoul, Korea. He got his M.S. and PhD degrees in Computer Science from Illinois Institute of Technology (IIT), Chicago, Illinois, USA in 1987 and 1991 respectively. He has been a professor in the Department of Computer Engineering, Kyung Hee University, Korea since 1993. He is a founding director of the Ubiquitous Computing Laboratory, and has been affiliated with a director of Neo Medical ubiquitous-Life Care Information Technology Research Center, Kyung Hee University since 2006. He is a member of ACM and IEEE.



Young-Koo Lee got his B.S., M.S. and PhD in Computer Science from Korea Advanced Institute of Science and Technology, Korea. He is an Assistant Professor in the Department of Computer Engineering at Kyung Hee University, Korea. His research interests include ubiquitous data management, data mining, and databases. He is a member of IEEE, IEEE Computer Society, and ACM.